






ELEVATION

NOTES:


- Maximum distance between turnbuckles shall be 200'-0"±.
- Intermediate turnbuckles to be placed in adjacent spans.
- Cable shall not be spliced between intermediate turnbuckles and end posts.
- Posts to be vertical.
- Alignment of holes in posts may vary to conform to slope of top of retaining wall.
- The Contractor shall verify all dependent dimensions in the field before ordering or fabricating any material.
- Line posts shall be braced horizontally and trussed diagonally in both directions at intervals not to exceed 1000'.
- Post pockets to be centered in top of wall.
- Typical end spans, braced in both directions, shall be constructed at changes in line where the angle of deflection is 15° or more.

SECTION A-A
ExistingSECTION B-B
ExistingSECTION C-C
New construction

ALTERNATIVE CABLE CONNECTION

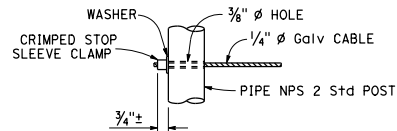

ALTERNATIVE DEAD END ANCHORAGE



POST POCKET

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

CABLE RAILING

NO SCALE

B11-47

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL NO. SHEETS

REGISTERED CIVIL ENGINEER

October 30, 2015
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER
Tillot Sotter
No. C42892
Exp. 3-31-16
CIVIL
STATE OF CALIFORNIA